PHOTOGRAPH THIS SHEET

ADA087879

LEVEL

INVENTORY

FTD-ID(RS)T-1860-79

DOCUMENT IDENTIFICATION

DISTRIBUTION STATEMENT A

Approved for public release;
Distribution Unlimited

DISTRIBUTION STATEMENT

ACCESSION FOR	
NTIS GRA&I	☒
DTIC TAB	☐
UNANNOUNCED	☐
JUSTIFICATION	
BY	
DISTRIBUTION /	
AVAILABILITY CODES	
DIST	AVAIL AND/OR SPECIAL
A	

DISTRIBUTION STAMP

DTIC
S ELECTE D
AUG 15 1980
D
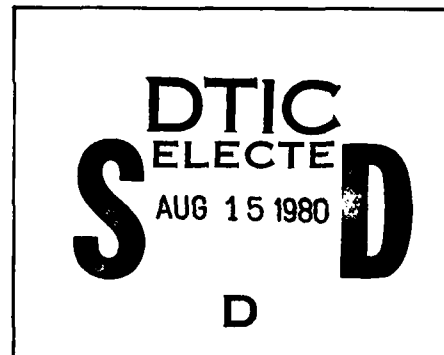
DATE ACCESSIONED

80 6 2 232

DATE RECEIVED IN DTIC

PHOTOGRAPH THIS SHEET AND RETURN TO DTIC-DDA-2

DOCUMENT PROCESSING SHEET

FOREIGN TECHNOLOGY DIVISION

SYNCHRONIZING THE START OF 400-KV VOLTAGE PULSE GENERATOR
(GIN-400) AND MEASURING CIRCUIT DURING OSCILLOGRAPHING
OF SHORT-TERM PROCESSES

by

M. I. Barash, I. S. Lavover, G. I. Chumakov

EDITED TRANSLATION

FTD-ID(RS)T-1860-79   11 December 1979

MICROFICHE NR: ΓTD-79-C-001583

CSI73063419

SYNCHRONIZING THE START OF 400-KV VOLTAGE PULSE
GENERATOR (GIN-400) AND MEASURING CIRCUIT DURING
OSCILLOGRAPHING OF SHORT-TERM PROCESSES

By: M. I. Barash, I. S. Lavover, G. I. Chumakov

English pages: 9

Source: Trudy Irkutskogo Politekhnicheskogo
         Instituta, Issue 57, 1971, pp. 320-325

Country of Origin: USSR
Translated by: Marilyn Olaechea
Requester: FTD/TQTD
Approved for public release; distribution unlimited.

U. S. BOARD ON GEOGRAPHIC NAMES TRANSLITERATION SYSTEM

Block	Italic	Transliteration	Block	Italic	Transliteration
А а	*А а*	A, a	Р р	*Р р*	R, r
Б б	*Б б*	B, b	С с	*С с*	S, s
В в	*В в*	V, v	Т т	*Т т*	T, t
Г г	*Г г*	G, g	У у	*У у*	U, u
Д д	*Д д*	D, d	Ф ф	*Ф ф*	F, f
Е е	*Е е*	Ye, ye; E, e*	Х х	*Х х*	Kh, kh
Ж ж	*Ж ж*	Zh, zh	Ц ц	*Ц ц*	Ts, ts
З з	*З з*	Z, z	Ч ч	*Ч ч*	Ch, ch
И и	*И и*	I, i	Ш ш	*Ш ш*	Sh, sh
Й й	*Я й*	Y, y	Щ щ	*Щ щ*	Shch, shch
К к	*К к*	K, k	Ъ ъ	*Ъ ъ*	"
Л л	*Л л*	L, l	Ы ы	*Ы ы*	Y, y
М м	*М м*	M, m	Ь ь	*Ь ь*	'
Н н	*Н н*	N, n	Э э	*Э э*	E, e
О о	*О о*	O, o	Ю ю	*Ю ю*	Yu, yu
П п	*П п*	P, p	Я я	*Я я*	Ya, ya

*ye initially, after vowels, and after ъ, ь; e elsewhere.
When written as ё in Russian, transliterate as yë or ë.

RUSSIAN AND ENGLISH TRIGONOMETRIC FUNCTIONS

Russian	English	Russian	English	Russian	English
sin	sin	sh	sinh	arc sh	arsinh
cos	cos	ch	cosh	arc ch	arcosh
tg	tan	th	tanh	arc th	artanh
ctg	cot	cth	coth	arc cth	arcoth
sec	sec	sch	sech	arc sch	arsech
cosec	csc	csch	csch	arc csch	arcsch

Russian	English
rot	curl
lg	log

1

SYNCHRONIZING THE START OF 400-KV VOLTAGE PULSE GENERATOR (GIN-400)
                CIRCUIT
AND MEASURING ~~CIRCUIT~~ DURING OSCILLOGRAPHING OF SHORT-TERM PROCESSES

M.I. Barash, I.S. Lavover, G.I. Chumakov.

Study of thunderstorm effects on electrical power supply circuits of mining enterprises and the pulse characteristics of rock and ground conductors requires oscillographing of short-term processes which last 0.5 μs or more.

The dual-beam cathode oscillographs OK-17 used in the GIN-400 make it possible to register single signals with fronts lasting 0.05-0.07 μs. Their start systems, however, require improvement.

As we know, the starting of an oscillograph (triggering of beam and beginning of scanning) can be done from either the studied signal, which is transmitted to the input of the amplifier

(autostart), or from a special start signal (independent start). In autostart the begining of beam scanning is determined by the amplitude, polarity, and transconductance of the arriving voltage, and triggering of the circuit occurs only when the amplitude of the voltage reaches a certain value.

In autostart registration of the front of a short-term process calls for the introduction of a special input signal converter, even though in this case the initial portion of the studied process is not registered. This cannot be permitted, for example, when studying the electrical strength of rock at the pulse front. The defect can be eliminated by introducing a delay element into the studied voltage circuit. In this case, however, distortion of the pulse is unavoidable.

In independent start (such start systems given rather detailed discussion in [1]) the oscillographing of the signal which is shaped at the input of the high-volt pulse generator involves a number of difficulties. First of all, it is impossible to use a time-rigid driven sweep. This is because of the probability-statistical time characteristics in the triggering of the air spark dischargers which commutate the high-volt capacitors [2].

The total time of commutation is equal to the sum of the

triggering times of each of its stages. Moreover, at optimal values
of the air spark gaps the breakdown time of the first gap
significantly exceeds the sum of breakdown times of the subsequent
gaps.

The need for a special system for synchronizing the starting of
oscillograph scannning is determined by the fact that the internal
delay system in the OK-17m oscillograph does not permit a delay of
more than 45-60 μs in the beginning of the beam scan. Simultaneously,
to reduce the scatter in breakdown time of the ignition gap in the
case of a charge voltage which changes under experiment conditions,
provison should be made in the sychronization block for shaping of an
ignition pulse with a steep front.

From the structural scheme of the syncrhonization block (Fi.g 1)
we learn that when the "start" command is given from the command
signal block (BKS) triggering of start pulse generator 1$^\Gamma$ occurs.
Its output pulse simultaneously starts the ignition control trigger
1T and delay device 1Cx 3. Trigger 1T$^\Gamma$ through amplifier Y1 and
electronic switch K triggers igaition generator 2$^\Gamma$. This results
in the appearance of a single discharge at the output of voltage
pulse genrator GIN-400. The studied signal, taken from the
low-voltage arm of voltage divider $\mathcal{A}$H is transmitted to the vertical
deflecting plates of one of the channels of pulse oscillograph OK-17

m. Since the studied signal is delayed in relation to the signal at the output of generator 1Г it becomes necessary to delay the tirggering signal of the oscillograph by a time which is slightly less that the time required to trigger the spark discharge gaps. The 1Cx3 device is used as the preliminary scanning delay element in the studied block. A square pulse of positive polarity from the output of trigger 2TГ is supplied through the internal delay circuit 2Cx3 to the input of the light pulse generator 3Г, which opens the tube for the time of the forward stroke of the beam and triggers sweep generator 4Г, which develops a voltage proportional to the time. The external standard-signal generator 5Г is connected to the vertical deflecting plates of the second beam of the oscillograph, thus providing a reference for time intervals on the oscillogram. The basic diagram of the main elements of the synchronization block of the GIN-400 is shown in Fig. 2. Starting pulse generator 1Г and delay device 1Cx3 take the form of driven collector-base coupled multivibrators.

The work of the driven multivibrator can be examined with delay device 1Cx3 serving as an example.

In the original state of the diagram transistor T_3 is opened and works in the saturation mode. Transistor T_4 is closed and the voltage on its collector is constant. The circuit is triggerd by a pulse of

negative polarity supplied to the base circuit of transistor T_4. The tripping of the circuit causes T_4 to open, while T_3 closes and remains in that state as a result of the drop in voltage on resistor R_8, caused by the overcharge current of capacitor C_4. The duration of the pulse shaping is determined by formula (1)

(1)
$$t_u = 0{,}7 \cdot R_8 \cdot C_4 \, ,$$

where R_8 is the resistance of the transistor base, kohm; C_4 – capacitance of capacitor, μF.

By changing the value of R_8 and C_4 it is possible to regulate the duration of pulse shaping within certain limits.

Symmetrical saturated triggers with individual starts 1Tr and 2Tr are used as the control elements in the circuit. When the "ignition" button in the BKS is released the triggers return to their original state. The ignition pulse is formed by electronic switch КЛ to whose emitter circuit the primary winding of the ignition transformer is connected.

Before the arrival of the signal from the output of amplifier У1 transistor T11 is opened and a direct current flows through the winding of ingnition transformer ТП . When transistor T11 is closed,

the current in the winding disappears. This leads to the development of a voltage surge of positive polarity in the secondary winding of the ingition transformer. This pulse is supplied to the first discharge gap and assures a single shock capacitance discharge of the GIN-400 onto the studied object. The shapes of the output signals of the inndividual cells of the circuit and the time shifts between signals are shown in Fig. 3.

The block designed to synchronize the starting of the GIN-400 and the measuring circuit is used in the laboratory of electrical explosion and lightning protection of the Department of Electrical Mining Engineering of the Irkustsk Polytechnical Institute to study inductions in electrical explosion circuits and the electrical strength of rock.

Bibliography

1.   Karandeyev K.B.   Special electrical measurement methods.
ГЭИ, 1963.

2.   Konev Yu.I., Mashukov Ye.V., Leonenko L.I., Nikitin V.B.
Transistor amplifiers and converters, GoSINTI, 1963.

3.   Kononov B.N.   Symmetrical triggers with flat semiconductor
triodes. Gosenergoizdat, 1960.

Fig. 1. Structural diagram of start synchronization block of GIN-400.
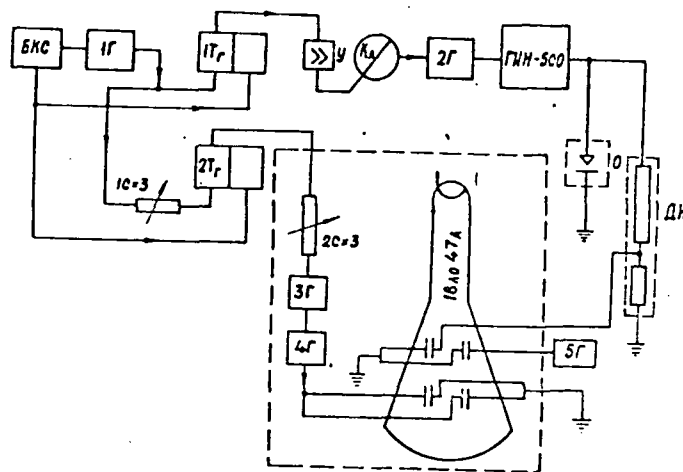

Fig. 2. Basic diagram of main elements in synchronization block. Key: to.
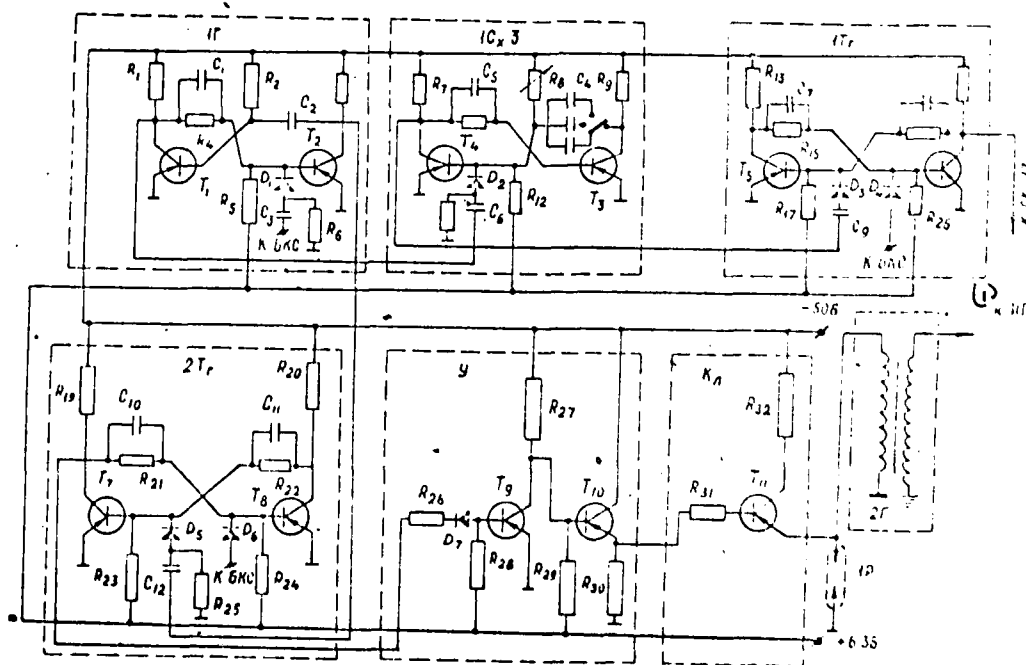
Fig. 3. Shapes of output pulses and time shifts. Key: µs.

DISTRIBUTION LIST

DISTRIBUTION DIRECT TO RECIPIENT

ORGANIZATION	MICROFICHE	ORGANIZATION	MICROFICHE
A205 DMATC	1	E053 AF/INAKA	1
A210 DMAAC	2	E017 AF/RDXTR-W	1
B344 DIA/RDS-3C	9	E403 AFSC/INA	1
C043 USAMIIA	1	E404 AEDC	1
C509 BALLISTIC RES LABS	1	E408 AFWL	1
C510 AIR MOBILITY R&D LAB/FIO	1	E410 ADTC	1
C513 PICATINNY ARSENAL	1	FTD	
C535 AVIATION SYS COMD	1	CCN	1
C591 FSTC	5	ASD/FTD/NIIS	3
C619 MIA REDSTONE	1	NIA/PHS	1
D008 NISC	1	NIIS	2
H300 USAICE (USAREUR)	1		
P005 DOE	1		
P050 CIA/CRS/ADD/SD	2		
NAVORDSTA (50L)	1		
NASA/NST-44	1		
AFIT/LD	1		
LLL/Code L-389	1		
NSA/1213/TDL	2		

FTD-ID(RS)t-1860-79